


INSTALLING AND OPERATING THE SPRINGTURNER

STEP 1:

Remove drum from main body of tool and separate it.

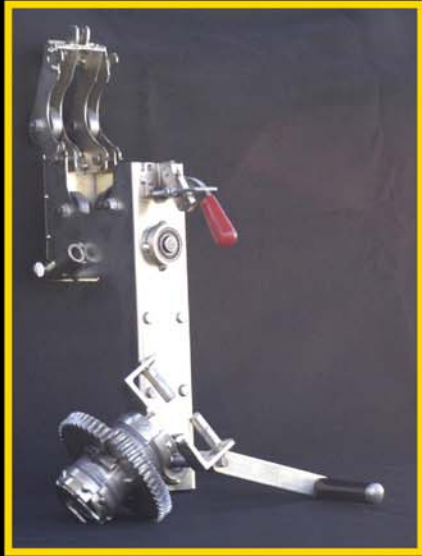


Note that the SpringTurner can be set up for right hand springs and left hand springs.



STEP 4:

Place the main body of tool around the drum and secure the latch so that the tool is locked around the drum.

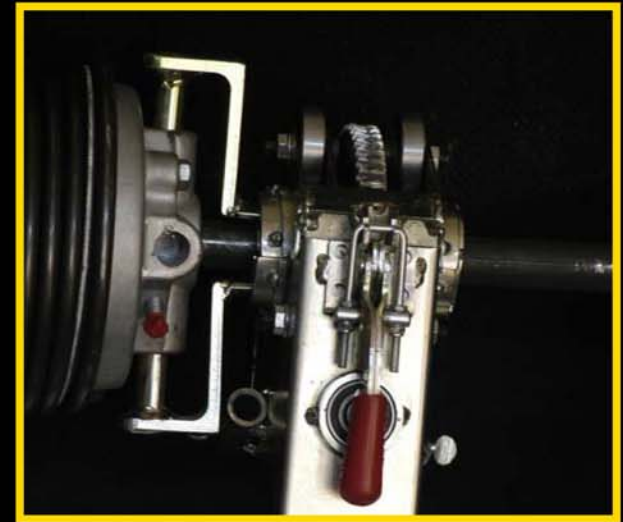

STEP 2:

Determine which winding fingers are needed for the size of spring you will be winding



STEP 3:

Slide the winding fingers separately into the drum & position the drum assembly over the garage door shaft and cone. Slide the drum back together.



STEP 5:

Determine which direction the spring is to be wound and use the handle or a drill to wind the spring. Operate drill on low speed only!



Safety is the #1 concern when winding heavy duty springs. Please adhere to all safety precautions when operating the SpringTurner.